

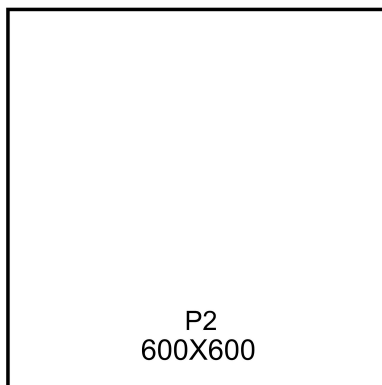


# LAURISSA




**Uniform Appearance**


*National Ceramic Industries Australia*

[www.ncia.com.au](http://www.ncia.com.au)


# LAURISSA



*White*




*Beige*



*Grey*



*Black*

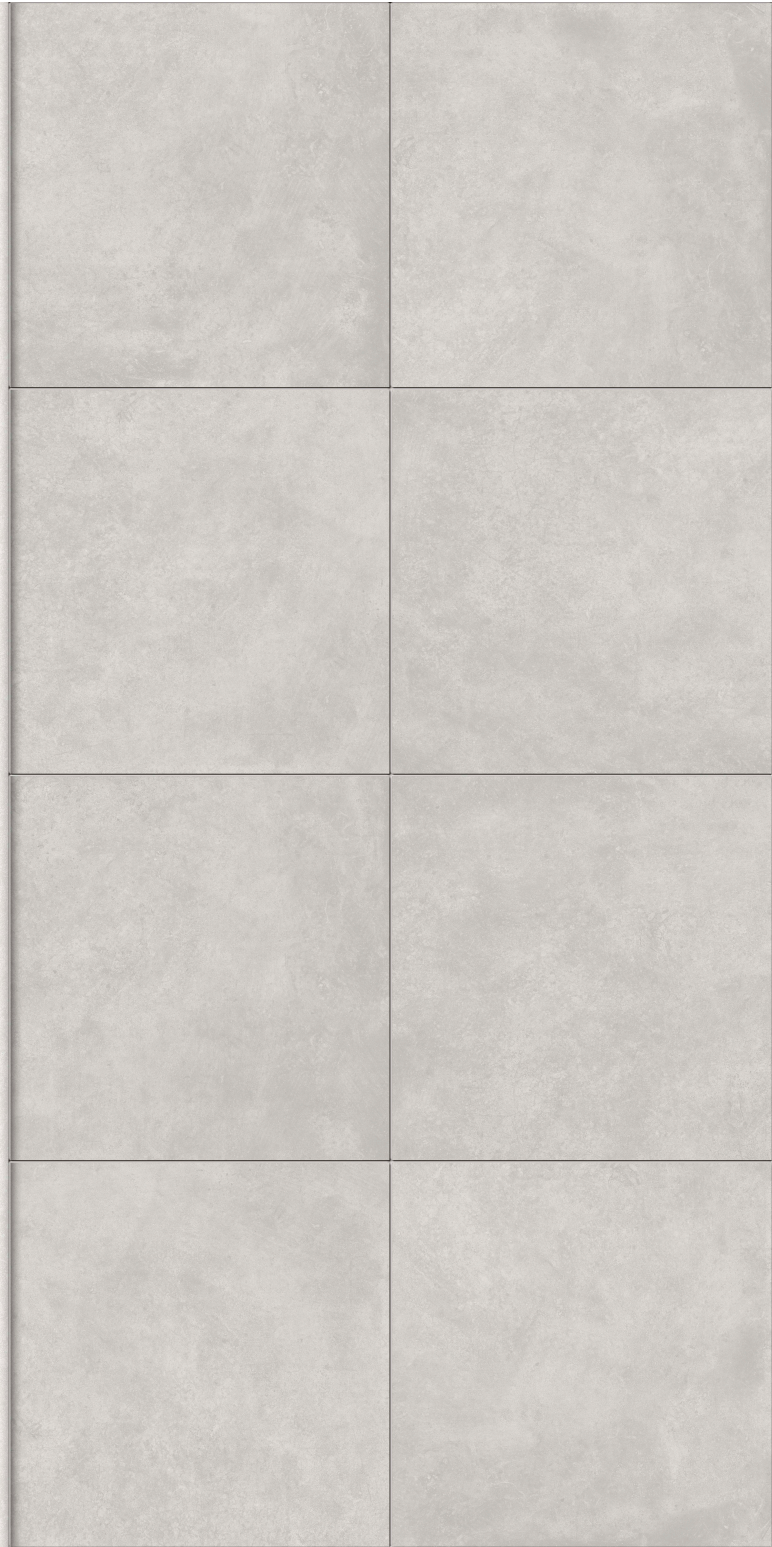

**LAURISSA**

**8 FACES 450x450**

**White, Beige, Grey, Black**


















**ncia**  
AUSTRALIA'S TILE MANUFACTURER  
[www.ncia.com.au](http://www.ncia.com.au)



# TECHNICAL SPECIFICATIONS

NCIA products conform to Group B1b

AU ISO 13006-2013 International and Australian Standards

	Length and Width	$\pm 0.6 \%$	$\pm 2.0 \text{ mm}$
	Thickness	$\pm 5 \%$	$\pm 0.5 \text{ mm}$
	Straightness of Sides	$\pm 0.5 \%$	$\pm 1.5 \text{ mm}$
	Rectangularity	$\pm 0.5 \%$	$\pm 2.0 \text{ mm}$
	Centre Curvature	$\pm 0.5 \%$	$\pm 2.0 \text{ mm}$
	Edge Curvature	$\pm 0.5 \%$	$\pm 2.0 \text{ mm}$
	Warpage	$\pm 0.5 \%$	$\pm 2.0 \text{ mm}$
	Water Absorption	$\leq 3 \%$	
	Resistance to Surface Abrasion PEI	Min. PEI 3 / Shine Min. PEI 2	
	Resistance to Scratch	MOHS 5	
	Resistance to Chemicals	Min Class GB	
	Resistance to Staining	Min 3	
	Resistance to Crazing	NO CRAZING	
	Resistance to Frost	RESISTANT	
	Moisture Expansion	0.01 %	
	Modulus of Rupture MOR [N/mm <sup>2</sup> ]	Min. 30 N/mm <sup>2</sup>	
	Surface Quality	Min 95 % Defect Free	